

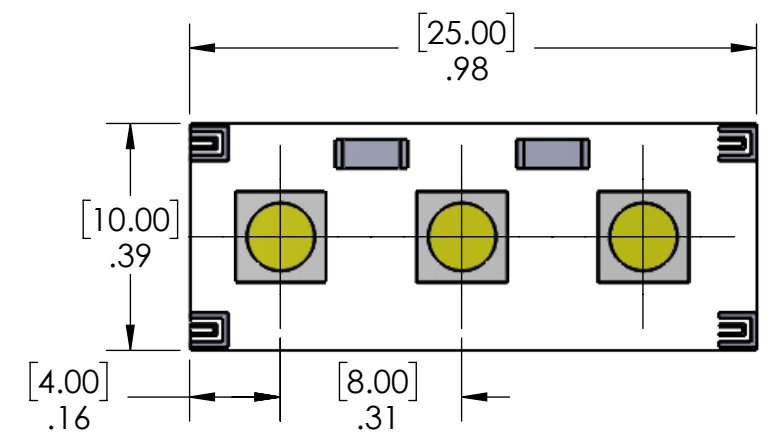


THIS DRAWING AND DIMENSIONS PROVIDED FOR REFERENCE ONLY



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	4/15/2024	JAKE JANOSO

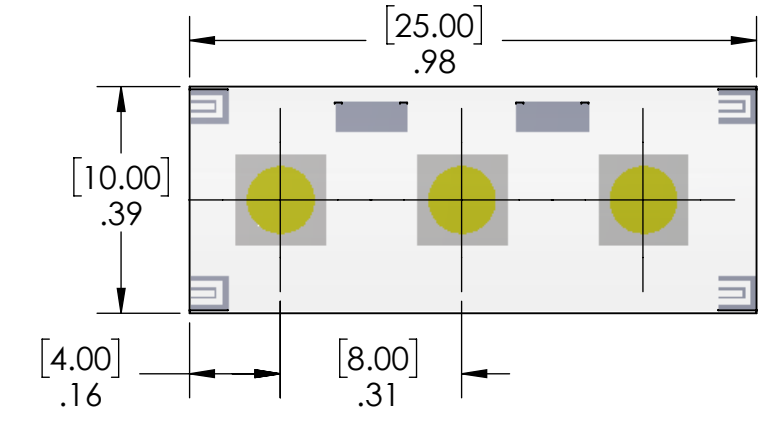


Unsealed
IP20

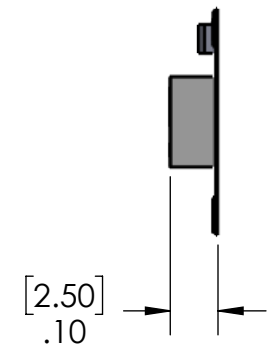

Dustproof
IP65

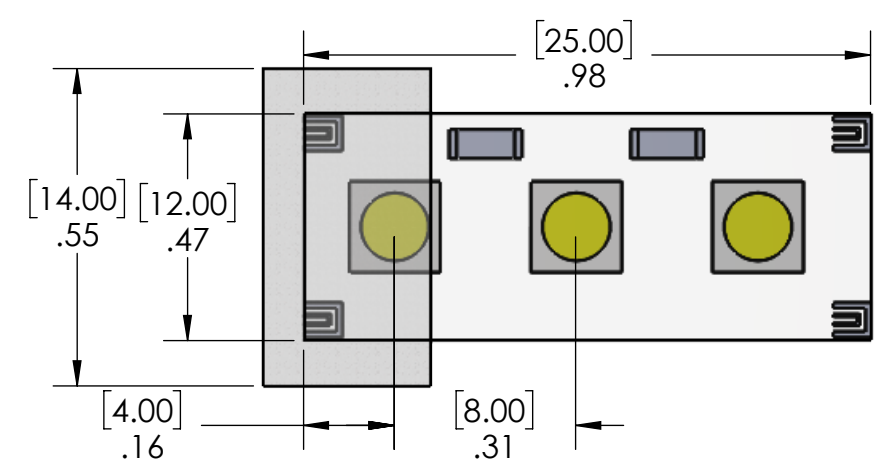

Sealed/Waterproof
IP67/IP68

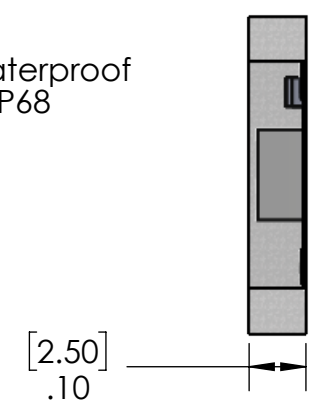

Standard length per reel is 5M (16 ft)
600 LED's per reel (3528)
Wire Gauge: 20 Ga

Operating Voltage: 12VDC +/- 5%
Power: 48 Watts
Conditions: Outdoor or Indoor
PCB: Flexible
Viewing Angle: 120-160 Degrees
Max Current: 4 Amps @ 12V Per Reel
Cut Spec: 3 LED per 25mm
Temp Range: -45 C TO + 85 C



UNSPECIFIED TOLERANCES

FRAC. ±1/64	X.XXX ±0.005
X.XX ±0.01	ANGLES ±1°
PROJECTIONS	DIMENSIONS
	IN (mm)

TOOL NO.	
DRAWN JAJ	DATE 4/12/2024
CHECKED	DATE
APVD	DATE

SORENSEN LIGHTED CONTROLS, INC.
100 Shield Street - West Hartford, CT 06110

TITLE		
SIZE B	DWG. NO. RJ-SERIES	REV A
USED ON	SCALE 3:1	SHEET 1 OF 1

PROPRIETARY NOTICE
NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE SOLE PROPERTY OF SORENSON LIGHTED CONTROLS, INC. AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED FOR ANY MANUFACTURING PURPOSES BY ANYONE WITHOUT THE EXPRESS CONSENT OF SORENSON LIGHTED CONTROLS, INC.